

# KOMATSU

## PC210LC-11M0

Australia & New Zealand Specifications



Photos may include overseas specification.

Hydraulic  
excavator

**Horsepower**

Gross: 123 kW / 165 HP @ 2000 RPM  
Net: 118 kW / 158 HP @ 2000 RPM

**Operating weight range**

PC210-11 22,410 -23,180 kg  
PC210LC-11 23,000 - 23,830 kg

**Bucket capacity**

0.50-1.20 m<sup>3</sup>

# Walk-around

## NET Horsepower

**Gross: 123 kW / 165 HP @ 2000 RPM**

**Net: 118 kW / 158 HP @ 2000 RPM**

## Operating weight

**PC210-11 22,410 – 23,180 kg**

**PC210LC-11 23,000 – 23,830 kg**

**PC210LCi-11 23,000 – 23,830 kg**

## Blade capacity

**0.50–1.20 m<sup>3</sup>**



## Performance & efficiency (all models)

New engine and hydraulic control technology improves operational efficiency and lowers fuel consumption by up to 7%.

### Komatsu Harmony

All major components are designed and manufactured by Komatsu. A fully integrated design produces an efficient, reliable system.

**A powerful Komatsu SAA6D107E-3 engine** provides a net output of 123 kW 165 HP.

**Komatsu Variable Geometry Turbocharger (KVGT)** uses a hydraulic actuator to provide optimum air flow under all speed and load conditions.

**Large displacement high efficiency pumps** provide high flow output at low engine speed, improving efficiency.

### Komatsu's Closed-centre Load Sensing System (CLSS)

provides quick response and smooth operation to maximise productivity.

### Enhanced working modes

are designed to match engine speed, pump delivery, and system pressure to the application.

The **KOMTRAX**® telematics system is standard on Komatsu equipment with no subscription fees. Using the latest wireless technology, **KOMTRAX**® transmits valuable information such as location, utilisation, and maintenance records to a PC or smartphone app. Custom machine reports are provided for identifying machine efficiency and operating trends. **KOMTRAX**® also provides advanced machine troubleshooting capabilities by continuously monitoring machine health.

### Large LCD Colour Machine Monitor

- 7" high resolution screen
- Provides "Ecology Guidance" for fuel efficient operation
- Enhanced attachment control

### KomVision

Standard for PC210LC-11M0.

### Equipment Management Monitoring System (EMMS)

continuously monitors machine operation and vital systems to identify machine issues and assist with troubleshooting.

### Enhanced working environment

- High back, heated air suspension seat with new adjustable arm rests
- Integrated ROPS cab design – Conforms to [ISO 12117-2 for excavators, also satisfies Level 1 operator Protective Guard [OPG] and Top guard [ISO 10262]
- AUX jack and [2] 12V power outlets

## Komatsu designed and manufactured components

### Wide access service doors

provide easy access for ground level maintenance.



### Handrails (standard)

on both sides provide more convenient access to the upper structure.

### Lockable single pole battery isolation switch

allows a technician to disconnect the power supply before servicing the machine.

### Komatsu Auto Idle Shutdown

helps reduce idle time and operating costs.


### Operator Identification System (coming soon)

can track machine operation for more than 100 operators.

## Komatsu new engine technologies

### Heavy-duty cooled Exhaust Gas Recirculation (EGR) system

The system recirculates a portion of exhaust gas into the air intake and lowers combustion temperatures, thereby reducing NOx emissions. (EGR gas flow has been decreased for Tier 4 Final with the addition of SCR technology.)

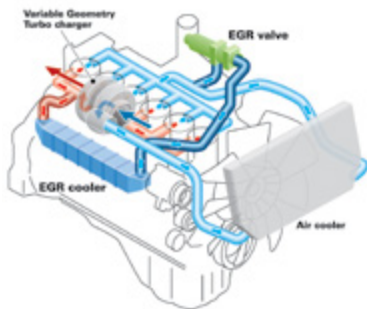


The system achieves a dynamic reduction of NOx, while helping reduce fuel consumption levels.

### Advanced electronic control system

the electronic control system performs high-speed processing of all signals from sensors installed in the vehicle providing total control of equipment in all conditions of use. Engine condition information is displayed via an on-board network to the monitor inside the cab, providing necessary information to the operator. Additionally, managing the information via KOMTRAX helps customers keep up with required maintenance.

### Komatsu Variable Geometry Turbocharger (KVG) system

The VGT system features proven Komatsu design hydraulic technology for variable control of air-flow and supplies optimal air according to load conditions. The upgraded version provides better exhaust temperature management.

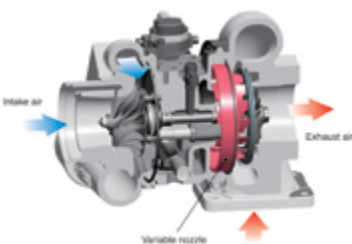


### Komatsu Auto Idle Shutdown

Komatsu auto idle shutdown automatically shuts the engine down after idling for a set period of time to reduce unnecessary fuel consumption and exhaust emissions.



### Heavy-Duty High-Pressure Common Rail (HPCR) Fuel Injection System

The system is designed to achieve an optimal injection of high-pressure fuel by means of computerised control, providing close to complete combustion to reduce PM emissions. While this technology is already used in current engines, the new system uses high pressure injection, thereby reducing PM emissions over the entire range of engine operating conditions. The Tier 4 Final engine has advanced fuel injection timing for reduced soot levels.

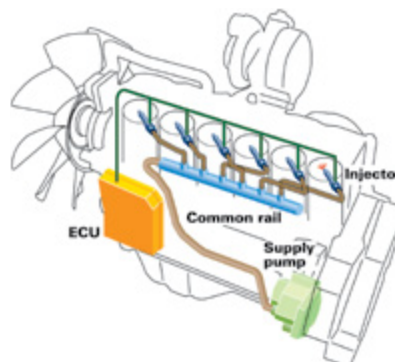



# Performance features

## Efficient Hydraulic System

The PC210/LC-11 uses a Closed-centre Load Sensing System (CLSS) that improves fuel efficiency and provides quick response to the operator's demands. The PC210/LC-11 also incorporates new technology to enhance the engine and hydraulic pump control. This total control system matches the engine and hydraulics at the most efficient point under any load condition. There have also been improvements in the main valve and hydraulic circuit to reduce hydraulic loss, resulting in higher efficiency and lower fuel consumption.



## Large Displacement High Efficiency Pump

Large displacement hydraulic implement pumps provide high flow output at lower engine RPM as well as operation at the most efficient engine speed.



## Working Mode Selection

The PC210LC-11M0 excavator is equipped with six working modes (P, E, L, B, ATT/P and ATT/E). An enhanced Power Mode provides improved hydraulic power and faster cycle times for improved performance in demanding applications. Each mode is designed to match engine speed, pump flow, and system pressure to the application. The PC210LC-11M0 features an attachment mode (ATT/E) that allows operators to run attachments while in Economy mode.

Working Mode	Application	Advantage
P	Power Mode	Maximum production, power and multifunction
E	Economy Mode	Good cycle times with reduced fuel consumption
L	Lifting Mode / Fine Control	Increased lifting power and fine control
B	Breaker Mode	One way flow for hydraulic breaker operation
ATT/P	Attachment Power Mode	Two way flow with maximum power
ATT/E	Attachment Economy Mode	Two way flow with most efficient fuel economy

- P** Performance priority  
**P mode**
- E** Fuel savings priority  
**E mode**
- L** Lifting operation  
**L mode**
- B** One way flow breaker operation  
**B mode**
- ATT/P** Two way flow attachment – Power  
**ATT/P mode**
- ATT/E** Two way flow attachment – Economy  
**ATT/E mode**

## High Rigidity Work Equipment

Booms and arms are constructed with thick plates of high tensile strength steel. In addition, these structures are designed with large cross sectional areas and large one piece steel castings in the boom foot, the boom tip, and the arm tip. The result is work equipment that exhibits long term durability and high resistance to bending and torsional stress. A standard HD boom design provides increased strength and reliability.



## Work environment



# Work environment



## Comfortable Working Space

### Wide spacious cab

The wide spacious cab includes a heated air suspension seat with reclining backrest. The seat height and position are easily adjusted using a pull-up lever. The armrest position is easily adjusted together with the console.

### Arm rest with simple height adjustment function

Arm rest with simple height adjustment function. A knob and plunger on the armrests allows easy height adjustment without the use of tools.



### Pressurised cab

#### Automatic climate control

Low vibration with cab damper mounting.

## Standard Equipment

Sliding window glass (left side)



Radio, Bluetooth and USB Media System



Remote intermittent wiper with windshield washer



Emergency stop and level indicator



ISO Level 2 OPG



Magazine box and cup holder



Defroster (conforms to the ISO standard)



One-touch storable front window lower glass



# Large high resolution LCD monitor



## New monitor panel interface design

An updated large high resolution LCD colour monitor enables accurate and smooth work. The interface has been redesigned to display key machine information in a new user friendly interface. A rear view camera has been added to the default main screen. The interface has a function that enables the main screen mode to be switched, thus enabling the optimum screen information for the particular work situation to be displayed.

### Indicators

- |                                    |                             |
|------------------------------------|-----------------------------|
| 1 Auto-decelerator                 | 8 Fuel gauge                |
| 2 Working mode                     | 9 Service metre, clock      |
| 3 Travel speed                     | 11 Fuel consumption gauge   |
| 4 Ecology gauge                    | 12 Guidance icon            |
| 5 Camera display                   | 13 Function switches        |
| 6 Engine coolant temperature gauge | 14 Camera direction display |
| 7 Hydraulic oil temperature gauge  |                             |


### Basic operation switches

- |                         |                         |
|-------------------------|-------------------------|
| 1 Auto-decelerator      | 5 Wiper                 |
| 2 Working mode selector | 6 Window washer         |
| 3 Travel speed selector | 7 Auto climate controls |
| 4 Buzzer cancel         |                         |

## KomVision

(Standard on all models manufactured after August 2021)

Images from 4 camera's are combined to display a "birds eye" view of the area around the machine for improved operator awareness. A second display with selectable individual camera views of the left, rear, and right sides is easily changed using the F4 button. A red line continuously shows where the counterweight will be during swinging and a camera icon indicates which camera is being displayed on individual camera display screen.



## Visual user menu

Pressing the F6 key on the main screen displays the user menu screen. The menus are grouped for each function, and use easy-to-understand icons which enable the machine to be operated easily.



- |                                       |                   |
|---------------------------------------|-------------------|
| 1 Energy saving guidance              | 4 Maintenance     |
| 2 Machine settings                    | 5 Monitor setting |
| 3 Aftertreatment devices regeneration | 6 Message check   |

# Work environment

## Support Efficiency Improvement

### Ecology guidance

While the machine is operating, ecology guidance pops up on the monitor screen to notify the operator of the status of the machine in real time.

### Ecology gauge and fuel consumption gauge

The monitor screen is provided with an ecology gauge and also a fuel consumption gauge which is displayed continuously.

In addition, the operator can set any desired target value of fuel consumption (within the range of the green display), enabling the machine to be operated with better fuel economy.



Ecology gauge | Fuel consumption gauge  
Ecology guidance

### Operator Identification Function

An identification ID can be set up for individual operator, application or jobs, and used to manage operation information of individual machines using KOMTRAX data. Data sent from KOMTRAX can be used to analyse operation status by operator as well as by machine.



### Operation record, fuel consumption history, and ecology guidance record

The ecology guidance menu enables the operator to check the operation record, fuel consumption history and ecology guidance record from the ecology guidance menu, using a single touch, thus enabling the total fuel consumption to be reduced.



Operation record



Ecology guidance record



Fuel consumption history



# Maintenance features



PC290LCi-11 shown.

# Maintenance features

## Large capacity air cleaner

The larger air cleaner can extend air cleaner life during long-term operation and helps prevent early clogging, and resulting power loss. A radial seal design is used for reliability.



## Battery isolation switch

A standard battery isolation switch allows a technician to disconnect the power supply and lock out before servicing the machine.



## Engine Access

Large rear opening hood provides excellent maintenance and service access to key engine components.



## Air conditioner filter

The air conditioner filter can be removed and installed without the use of tools for easy filter maintenance.

## Washable cab floor mat

## Sloping track frame

## Long-life oils, filters

## Fuel Filters

Large high-efficiency fuel filter and pre-filter with water separator removes contaminants from fuel for improved fuel injection system life.




High efficiency fuel filter

Fuel pre-filter (with water separator)

Engine oil & Engine oil filter	every 500 hours
Hydraulic oil	every 5000 hours
Hydraulic oil filter	every 1000 hours


## Easy access to engine oil filter and fuel drain valve

Engine oil filter and fuel drain valve are remote mounted to improve accessibility.

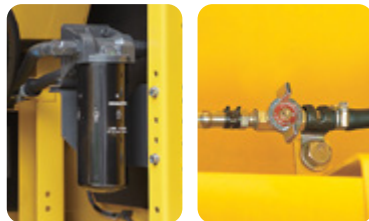

## DT-type connectors

Sealed DT-type electrical connectors provide high reliability, water and dust resistance.



## Maintenance information

### "Maintenance time caution lamp" display

When the remaining time to maintenance becomes less than 30 hours\*, a maintenance time monitor appears. Pressing the F6 key switches the monitor to the maintenance screen.

\*: The setting can be changed within the range between 10 and 200 hours.



Maintenance screen

# KALSS

## Australian standard specification



**Rotating Amber Beacon**  
Fitted with factory guard.



**Level Indicator, Overload Alarm & Anti-Burst Valves**  
Enable safety and compliance when lifting suspended loads.



**Additional Lighting**  
Extra lighting on cab and counterweight for improved visibility.



**Proportional Hand Controls**  
Enables proportional hand control of attachment speed.



**Higher capacity air conditioner**  
With increased cool down performance.

**Bump rails**  
For upper protection when slewing.

**Rock guard**  
Reinforced steel plate and ribs to provide additional protection of arm structure.

**Revolving frame under covers**  
Protects and prevents ingress of material into engine bay.

**Factory fitted quick hitch and hammer piping**  
Enables use with a greater variety of attachments. Also fitted with provision for tilt circuit including valve.



**Lower Front Window Guard**  
Protects cabin windscreen against rocks and debris.



**Battery Isolation**  
Single pole, lockable Bosch-type battery isolation.



**E-Stops**  
Allow compliance to site safety requirements.



**Bolt-on Top Guard**  
OPG level 2 (ISO 10262) for falling object protection.

Specification also includes factory fitted provisions for fire extinguisher, turbo timer, UHF and vandal covers to reduce lead times and costs. Photos may include optional equipment.

# KOMTRAX equipment monitoring

Get the whole story with



## What

- KOMTRAX is Komatsu's remote equipment monitoring and management system. KOMTRAX continuously monitors and records machine health and operational data.
- Information such as fuel consumption, utilisation, and a detailed history lowering owning and operating cost.

## Who

- KOMTRAX is standard equipment on all Komatsu construction products.

## When

- Know when your machines are running or idling and make decisions that will improve your fleet utilisation.
- Detailed movement records ensure you know when and where your equipment is moved.
- Up to date records allow you to know when maintenance is due and help you plan for future maintenance needs.

## Where

- KOMTRAX data can be accessed virtually anywhere through your computer, the web or your smart phone.
- Automatic alerts keep fleet managers up to date on the latest machine notifications.

## Why

- Knowledge is power – make informed decisions to manage your fleet better.
- Knowing your idle time and fuel consumption will help maximise your machine efficiency.
- Take control of your equipment – any time, anywhere.



**KOMTRAX**

For construction and compact equipment.

**KOMTRAX Plus**

For production and mining class machines.

# Specifications

## Engine

Model	Komatsu SAA6D107E-3*		
Type	Water-cooled, 4-cycle, direct injection		
Aspiration	Variable geometry turbocharged, aftercooled, cooled EGR		
<b>Number of cylinders</b>	<b>6</b>		
Bore	<b>107 mm 4.21"</b>		
Stroke	<b>124 mm 4.88"</b>		
Piston displacement	<b>6.69 ltr 408 in<sup>3</sup></b>		
Horsepower:			
ISO 9249 / SAE J1349	Net <b>122.8 kW 165 HP</b>		
Fan at maximum speed	Net <b>118.6 kW 159 HP</b>		
Rated rpm	<b>2000</b>		
Fan drive method for radiator cooling	Mechanical Mechanical with viscous fan clutch		
Governor	All-speed control, electronic		

\*Non-Tier 4 engine fitted.

## Hydraulics

Type	HydrauMind (Hydraulic Mechanical Intelligence system, closed-centre system with load sensing valve and pressure compensated valves)		
Number of selectable working modes	6		
Main pump:			
Type	Variable displacement piston type		
Pumps for	Boom, arm, bucket, swing, and travel circuits		
Maximum flow	490 ltr/min 129.4 gal/min		
Supply for control circuit	Self reducing valve		
Relief valve setting:			
Implement circuits	<b>37.3 MPa</b>	<b>380 kgf/cm<sup>2</sup></b>	5,400 psi
Travel circuit	<b>37.3 MPa</b>	<b>380 kgf/cm<sup>2</sup></b>	5,400 psi
Swing circuit	<b>28.9 MPa</b>	<b>285 kgf/cm<sup>2</sup></b>	4,190 psi
Pilot circuit	<b>3.2 MPa</b>	<b>33 kgf/cm<sup>2</sup></b>	470 psi
Hydraulic cylinders:			
(Number of cylinders – bore x stroke x rod diameter)			
Boom	<b>2-130 mm x 1334 mm x 90 mm</b>	5.1" x 52.5" x 3.5"	
Arm	<b>1-135 mm x 1490 mm x 95 mm</b>	5.3" x 58.7" x 3.7"	
Bucket	<b>1-115 mm x 1120 mm x 80 mm</b>	4.5" x 44.1" x 3.2"	

## Drives and brakes

Steering control	Two lever with pedals		
Drive method	Hydrostatic		
Maximum drawbar pull	202 kN 20570 kg 45,349 lb		
Gradeability	70%, 35°		
Maximum travel speed (auto shift):			
High	<b>5.5 km/h</b> 3.4 mph		
Mid	<b>4.1 km/h</b> 2.5 mph		
Low	<b>3.0 km/h</b> 1.9 mph		
Service brake	Hydraulic lock		
Parking brake	Mechanical disc brake		

## Swing system

Drive method	Hydrostatic
Swing reduction	Planetary gear
Swing circle lubrication	Grease-bathed
Service brake	Hydraulic lock
Holding brake/Swing lock	Mechanical disc brake
Swing speed	12.4 rpm
Swing torque	<b>6900 kg•m</b> 49,907 ft lbs

## Undercarriage

Centre frame	X-frame
Track frame	Box-section
Seal of track	Sealed track
Track adjuster	Hydraulic
Number of shoes (each side)	49
Number of carrier rollers (each side)	2
Number of track rollers (each side)	9

## Coolant & lubricant capacity (Refilling)

Fuel tank	<b>400 ltr</b>	105.7 U.S. gal
Coolant	<b>30.1 ltr</b>	8.1 U.S. gal
Engine	<b>23.1 ltr</b>	6.1 U.S. gal
Final drive, each side	<b>5.0 ltr</b>	1.3 U.S. gal
Swing drive	<b>6.5 ltr</b>	1.7 U.S. gal
Hydraulic tank	<b>132 ltr</b>	34.9 U.S. gal
Hydraulic system	<b>234 ltr</b>	61.8 U.S. gal

## Operating weight (approximate)

Operating weight includes **5700 mm** one-piece HD boom, **2900 mm** HD arm, rated capacity of lubricants, coolant, full fuel tank, operator, standard equipment, KGA dual lock quick hitch, and SAE heaped **0.97 m<sup>3</sup>** bucket.

Triple-grouser shoes	Operating weight		Ground pressure	
	PC210-11	PC210LC-11	PC210-11	PC210LC-11
600 mm	22,640 kg	23,240 kg	0.52 kg/cm <sup>2</sup>	0.49 kg/cm <sup>2</sup>
700 mm	22,890 kg	23,510 kg	0.46 kg/cm <sup>2</sup>	0.42 kg/cm <sup>2</sup>
800 mm	23,180 kg	23,830 kg	0.41 kg/cm <sup>2</sup>	0.38 kg/cm <sup>2</sup>

## Component weights


Arm including bucket cylinder and linkage:			
<b>2900 mm</b> HD arm assembly	<b>1200 kg</b>	2,646 lb	
One piece HD boom including arm cylinder:			
<b>5700 mm</b> boom assembly	<b>1953 kg</b>	4,306 lb	
Boom cylinders x 2	<b>205 kg</b>	452 lb	
Counterweight (standard)	<b>3830 kg</b>	8,443 lb	

# PC210LC-11M0

## Dimensions


Arm Length	2900 mm	
	PC210-11	PC210LC-11
A Overall length	9705 mm	9705 mm
B Length on ground (transport)	5000 mm	5000 mm
C Overall height (to top of boom)*	2995 mm	2995 mm
D Overall width	2800 mm	2980 mm
E Overall height (to top of cab)*	3045 mm	3045 mm
F Overall height (to top of handrail)*	3135 mm	3135 mm
G Ground clearance, counterweight	1085 mm	1085 mm
H Ground clearance, minimum	440 mm	440 mm
I Tail swing radius	3020 mm	3020 mm
J Track length on ground	3275 mm	3655 mm
K Track length	4070 mm	4450 mm
L Track gauge	2200 mm	2380 mm
M Width of crawler	2800 mm	2980 mm
N Shoe width	600 mm	600 mm
O Grouser height	26 mm	26 mm
P Machine cab height	2250 mm	2250 mm
Q Machine height to top of engine cover	2765 mm	2765 mm
R Machine upper width	2850 mm	2850 mm
S Distance, swing centre to rear end	2990 mm	2990 mm

\*Including grouser height

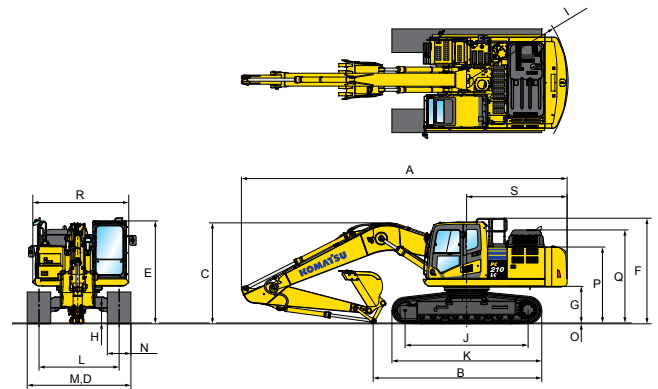


## Working range

Arm Length	2900 mm
A Max. digging height	10000 mm
B Max. dumping height	7110 mm
C Max. digging depth	6620 mm
D Max. vertical wall digging depth	5980 mm
E Max. digging depth for 8° level bottom	6370 mm
F Max. digging reach	9875 mm
G Max. digging reach at ground level	9700 mm
H Min. swing radius	3040 mm
SAE rating:	
Bucket digging force at power max.	132 kN 13500 kg
Arm crowd force at power max.	103 kN 10500 kg
ISO rating:	
Bucket digging force at power max.	149 kN 15200 kg
Arm crowd force at power max.	108 kN 11000 kg

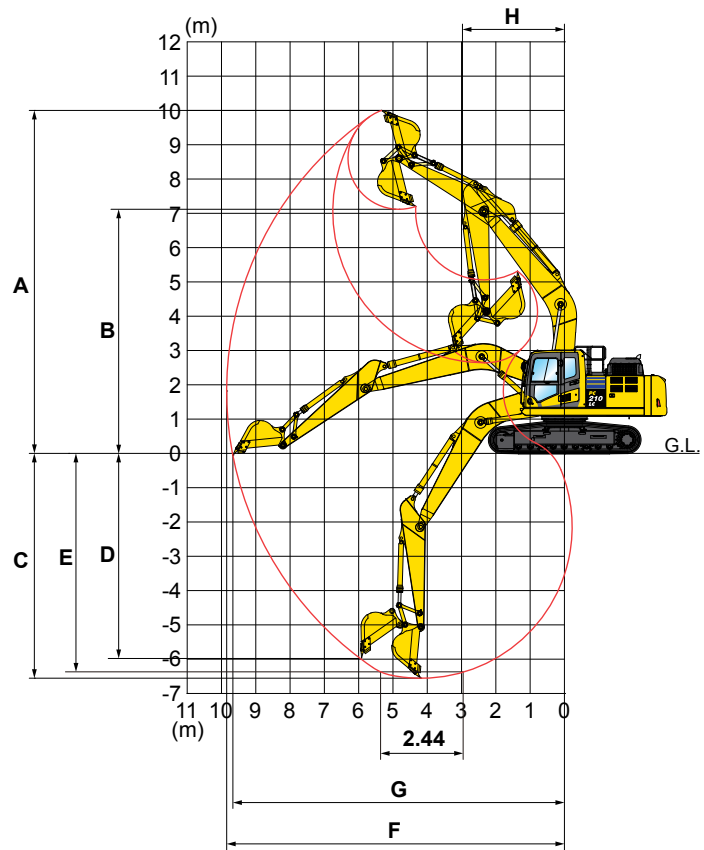

## Lift capacities

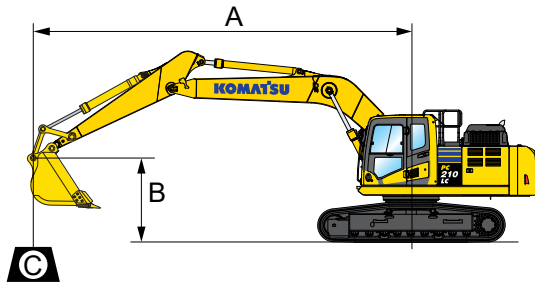

A:	Reach from swing centre
B:	Bucket hook height
C:	Lifting capacity
Cf:	Rating over front
Cs:	Rating over side
⊗:	Rating at maximum reach

**Conditions:**

Boom length:	5700 mm
Arm length:	2900 mm
Shoes:	600 mm triple grouser
Bucket:	650 kg

Unit: kg

### PC210-11

A/B	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		⊗ MAX	
	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.5 m	-	-	-	-	-	-	*4050	*4050	-	-	*2850	*2850
6.0 m	-	-	-	-	-	-	*4250	*4250	*3050	*3050	*2750	*2750
4.5 m	-	-	-	-	*5500	*5500	*4850	4550	4500	3050	*2750	2600
3.0 m	-	-	*11550	*11550	*7700	6800	*5850	4250	4400	2900	*2900	2300
1.5 m	-	-	*6800	*6800	9600	6250	6100	4000	4250	2750	*3200	2200
0 m	-	-	*5200	*5200	9350	5850	5850	3800	4100	2650	3450	2250
-1.5 m	*5150	*5150	*9300	*9300	9150	5750	5750	3700	4050	2600	3750	2450
-3.0 m	*9750	*9750	*14800	11500	9250	5800	5750	3700	-	-	4500	2900
-4.5 m	-	-	*12900	*11550	*9050	6000	-	-	-	-	6400	4150

\* Load is limited by hydraulic capacity rather than tipping. Ratings are based on SAE standard No. J1097. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.

### PC210LC-11

A/B	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		⊗ MAX	
	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.5 m	-	-	-	-	-	-	*4050	*4050	-	-	*2850	*2850
6.0 m	-	-	-	-	-	-	*4250	*4250	*3050	*3050	*2750	*2750
4.5 m	-	-	-	-	*5500	*5500	*4850	*4850	*4550	3450	*2750	*2750
3.0 m	-	-	*11550	*11550	*7700	7600	*5850	4850	*5050	3350	*2900	2650
1.5 m	-	-	*6800	*6800	*9750	7100	*6900	4550	5100	3200	*3200	2550
0 m	-	-	*5200	*5200	*10750	6750	7150	4350	5000	3050	*3700	2600
-1.5 m	*5150	*5150	*9300	*9300	*10900	6600	7000	4250	4950	3000	*4600	2800
-3.0 m	*9750	*9750	*14800	13400	*10500	6650	7050	4250	-	-	5500	3350
-4.5 m	-	-	*12900	*12900	*9050	6850	-	-	-	-	*6650	4750

\* Load is limited by hydraulic capacity rather than tipping. Ratings are based on SAE standard No. J1097. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.

## Standard equipment

- 3 speed travel with auto shift
- Access handrails – counterweight
- Alternator, 90 A, 24 V
- Arm, 2900 mm
- Auto idle
- Auto idle shut down
- Automatic air conditioner, large capacity
- Automatic engine warm-up system
- Auxiliary input (3.5 mm jack)
- Batteries, large capacity
- Battery isolation switch, dual pole, lockable
- Boom, 5700 mm
- Boom and arm burst valve protection
- Bump rails
- Cab guards
  - Lower front window guard
  - Integrated top guard, OPG Level 1
  - Bolt on top guard, OPG Level 2
- Carrier rollers, (2 each side)
- Converter, (2) x 12 V
- Counterweight, 3830 kg
- Dry type air cleaner, double element
- Dual flow hammer piping
- Electric horn
- Emergency stops (3)
- EMMS monitoring system
- Engine, Komatsu SAA6D107E-3
- Fan guard structure
- Fire extinguisher, 1.5 kg (for PC210LCi-11)
- Fuel system pre-filter 10 micron
- Guard belly plate (for PC210LCi-11)
- High back air suspension seat, with heat
- High pressure in-line hydraulic filters
- Hydraulic track adjusters
- Hydraumind closed centre load sensing system
- Jump start receptacle
- KOMTRAX
- KomVision
- Large LCD colour monitor, high resolution
- Level indicator
- Lock lever
- Lock lever, auto-lock
- Mirrors (LH, RH & sidewise)
- Operator identification system (available August 2021)
- Overload alarm
- Power maximising system
- PPC hydraulic control system
- Proportional control handles
- Provision for tilt circuit, including valve
- Pump/engine room partition cover
- Quick hitch piping with safety switch and alarm
- Radiator and oil cooler dustproof net
- Radio Bluetooth USB media system
- Rear reflectors
- Revolving frame undercovers
- ROPS cab (ISO 12117-2) with vandal guard provisions
- Rotating beacon (LED) with guard
- Seat belt indicator
- Seat belt, retractable, 78 mm
- Secondary engine shutdown switch
- Side access hand rails
- Side by side coolers
- Slip resistant foot plates
- Starter circuit isolation, lockable
- Starter motor, 5.5 kW/24 V x 1
- Suction fan
- Thermal and fan guards
- Track roller guides, 3 each side
- Track rollers, 9 each side
- Track frame swivel guard
- Track shoes, triple grouser, 600 mm
- Travel alarm
- Turbo timer
- Working lights
  - 1 x boom
  - 1 x RH
  - 3 x cab
  - 1 x counterweight
- Working mode selection system

## Optional equipment

- Autogrease system
- Cab guard – Full front guard, OPG Level 2
- Cab vandal guard set
- Canvas seat cover (for PC210LC-11)
- Fire extinguisher, 1.5 kg (for PC210LC-11)
- Fire extinguisher, 4.5 kg
- Fire extinguisher, 9 kg
- Fuel cap vandal guard
- Guard belly plate (for PC210LC-11)
- Jump start receptacle
- Radio, UHF (for PC210LC-11)
- Track roller guards, full length
- Track shoes, triple grouser, 700 mm
- Track shoes, triple grouser, 800 mm
- Window tinting

## Attachment options

- Bucket, general purpose, KGA 600 mm, 0.39 m<sup>3</sup>
- Bucket, general purpose, KGA 900 mm, 0.68 m<sup>3</sup>
- Bucket, general purpose, KGA 1200 mm, 0.97 m<sup>3</sup>
- Bucket, slope finishing, KGA 2000 mm, 1.10 m<sup>3</sup>
- Quick hitch, KGA, dual lock
- Quick hitch, KGA, dual lock, tilting
- Ripper, KGA, single tyne

## Now available

### Komatsu JMHB230V-1 Hydraulic Breaker



Model Type	JMHB230V-1	
Working weight	kg	1,450
Oil flow (min - max)	ℓ/min	120 - 170
Operating pressure (max)	MPa	135
Impact rate	bpm	285 - 1,050
Chisel diameter	mm	122
Acceptable back pressure	bar	8
Base machine (min - max)	Ton	18 - 30

For a complete list of available attachments, please contact your local Komatsu representative.

# Notes

---

## For more information:

**Australia:** 1300 199 054 | [my.komatsu.com.au](https://my.komatsu.com.au)

**New Zealand:** 0800 433 116 | [my.komatsu.co.nz](https://my.komatsu.co.nz)

Product designs, specifications and/or data in this document are provided for informational purposes only and are not warranties of any kind. Product designs and/or specifications may be changed at any time without notice. The only warranties that apply to sales of products and services are Komatsu's standard written warranties, which will be furnished upon request.

Komatsu and other trademarks and service marks used herein are the property of Komatsu Ltd., Komatsu Australia Pty Ltd., Komatsu America Corp., Komatsu Mining Corp., or one of their affiliates, or the respective owners or licensees.

**KOMATSU**

