MONTABERT®

HYDRAULIC ROCK BREAKER

SD6

NEW KEY ASSET FOR ALL JOBSITES

DESIGNED FOR 700 KG TO 1.2 TONNES CARRIERS

POWERFUL, SAFE AND COMPACT

LANDSCAPING, DEMOLITION, TRENCHING, CIVIL ENGINEERING, INSIDE AND OUTSIDE: VERSATILE AND EFFICIENT

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Tie rod free:** less weight and cost, more power and reliability.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Improved soundproofing :** lower noise levels for urban jobsites.
- **Easy handling:** two lifting points to handle the breaker with perfect balance and safety, also acting as hoses protection.
- **Tool changing:** new user friendly, simple, safe and reliable system, with one single retainer.

HYDRAULIC ROCK BREAKER

SD6

NEW KEY ASSET FOR ALL JOBSITES

WEIGHT & DIMENSIONS

WEIGHT (KG/LB)		
BREAKER	55	120
+ MOUNTED TOOL	58.7	128
+ MOUNTED ADAPTER PLATE (MAX)	73	161
DIMENSIONS (MM/IN)		
A	865	34
B	200	8
C	281	11
D	595	23
E	147	6
F	172	7
G	24	0.94

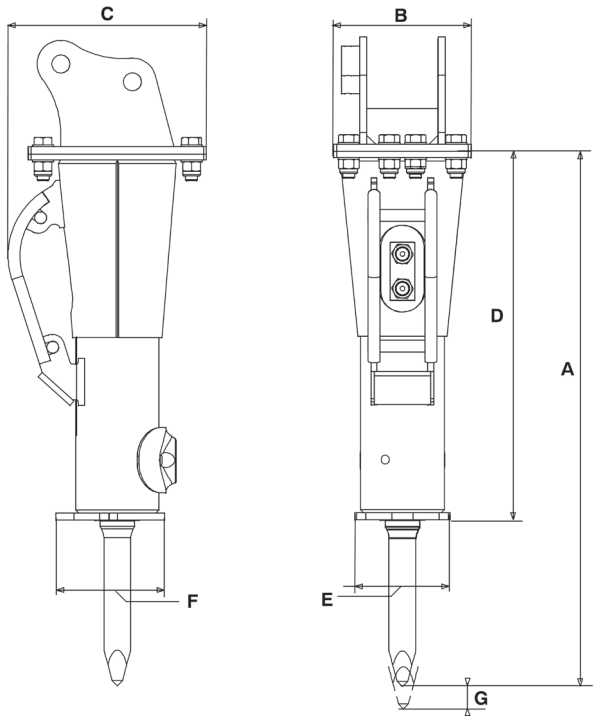

OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, MT)		0.7 - 1.2
OIL FLOW (MIN-MAX, L/MIN / GPM)	12 - 23	3.2 - 6
OPERATING PRESSURE (MAX, BAR/PSI)	110	1,600
BACK PRESSURE (MAX, BAR/PSI)	20	290
INPUT POWER (KW)		4.2
STRIKING FREQUENCY (MIN-MAX, BPM)		725 - 1,460
NOISE LEVEL /10M (DBA)		87
SOUNDPROOFING		standard
HOSE PROTECTION		standard

CONSUMABLES	PART NUMBER
GREASE CARTRIDGES (X48)	86799152

OPTIONS	PART NUMBER
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

MAINTENANCE KITS	PART NUMBER
LEVEL 1	86651056
LEVEL 2	101112768
LEVEL 3 (+2 WARRANTY YEARS*)	101112769

TOOLS		
DIAMETER (MM/IN)	37 / 1.45	37 / 1.45
LENGTH (MM/IN)	438 / 17.2	438 / 17.2
WEIGHT (KG/LB)	3.7 / 8	3.37 / 7.42
PART NUMBER	86646106	86646114

The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property.
©2024 Montabert. All rights reserved.

*see warranty conditions

montabert.com - montabertusa.com

US-SD6-V042024

MONTABERT®

HYDRAULIC ROCK BREAKER

SD8

NEW KEY ASSET FOR ALL JOBSITES

DESIGNED FOR 1 TO 1.7 TONNES CARRIERS

POWERFUL, SAFE AND COMPACT

LANDSCAPING, DEMOLITION, TRENCHING, CIVIL ENGINEERING, INSIDE AND OUTSIDE: VERSATILE AND EFFICIENT

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Tie rod free:** less weight and cost, more power and reliability.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Improved soundproofing :** lower noise levels for urban jobsites.
- **Easy handling:** two lifting points to handle the breaker with perfect balance and safety, also acting as hoses protection.
- **Tool changing:** new user friendly, simple, safe and reliable system, with one single retainer.

HYDRAULIC ROCK BREAKER

SD8

NEW KEY ASSET FOR ALL JOBSITES

WEIGHT & DIMENSIONS		
WEIGHT (KG/LB)		
BREAKER	71	156
+ MOUNTED TOOL	76.4	168
+ MOUNTED ADAPTER PLATE (MAX)	112	247
DIMENSIONS (MM/IN)		
A	898	35
B	230	9
C	334	13
D	618	24
E	159	6.25
F	183	7.20
G	25	0.98

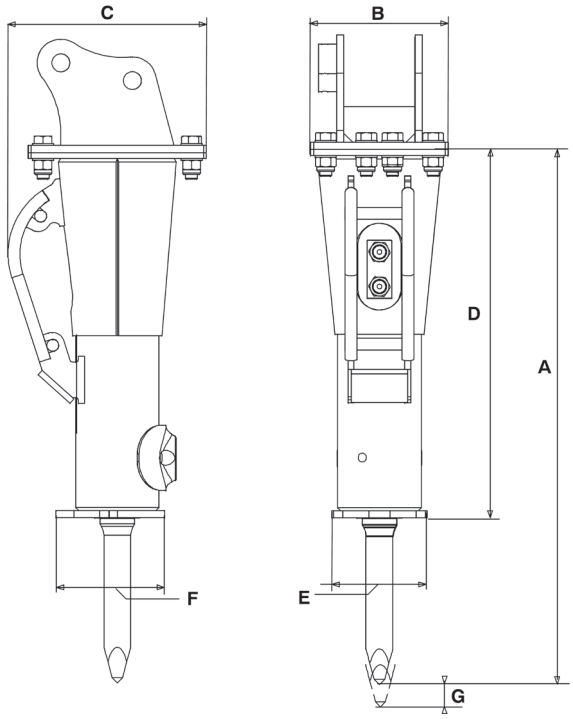

OPERATING INFORMATION		
CARRIER WEIGHT RANGE (MIN-MAX, MT)		1 - 1.7
OIL FLOW (MIN-MAX, L/MIN / GPM)	15 - 30	4 - 8
OPERATING PRESSURE (MAX, BAR/PSI)	120	1,740
BACK PRESSURE (MAX, BAR/PSI)	35	507
INPUT POWER (KW)		6
STRIKING FREQUENCY (MIN-MAX, BPM)		800 - 1,600
NOISE LEVEL /10M (DBA)		90
SOUNDPROOFING		standard
HOSE PROTECTION		standard

CONSUMABLES	PART NUMBER
GREASE CARTRIDGES (X48)	86799152

OPTIONS	PART NUMBER
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

MAINTENANCE KITS	PART NUMBER
LEVEL 1	86638947
LEVEL 2	101112771
LEVEL 3 (+2 WARRANTY YEARS*)	101112772

TOOLS			
DIAMETER (MM/IN)	45 / 1.77	45 / 1.77	45 / 1.77
LENGTH (MM/IN)	455 / 17.9	455 / 17.9	455 / 17.9
WEIGHT (KG/LB)	5.1 / 11	5.2 / 11.46	5.4 / 12
PART NUMBER	86631918	86631900	86638566

The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property.
©2024 Montabert. All rights reserved.

*see warranty conditions

montabert.com - montabertusa.com

US-SD8-V042024

MONTABERT®

HYDRAULIC ROCK BREAKER

SD12

NEW KEY ASSET FOR ALL JOBSITES

DESIGNED FOR 1.2 TO 2.2 TONNES CARRIERS

POWERFUL, SAFE AND COMPACT

LANDSCAPING, DEMOLITION, TRENCHING, CIVIL ENGINEERING, INSIDE AND OUTSIDE: VERSATILE AND EFFICIENT

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Tie rod free:** less weight and cost, more power and reliability.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Improved soundproofing :** lower noise levels for urban jobsites.
- **Easy handling:** two lifting points to handle the breaker with perfect balance and safety, also acting as hoses protection.
- **Tool changing:** new user friendly, simple, safe and reliable system, with one single retainer.

HYDRAULIC ROCK BREAKER

SD12

NEW KEY ASSET FOR ALL JOBSITES

WEIGHT & DIMENSIONS		
WEIGHT (KG/LB)		
BREAKER	91	201
+ MOUNTED TOOL	97	214
+ MOUNTED ADAPTER PLATE (MAX)	133	293
DIMENSIONS (MM/IN)		
A	926	36
B	230	9
C	346	14
D	637	25
E	166	7
F	190	7.48
G	34	1.33

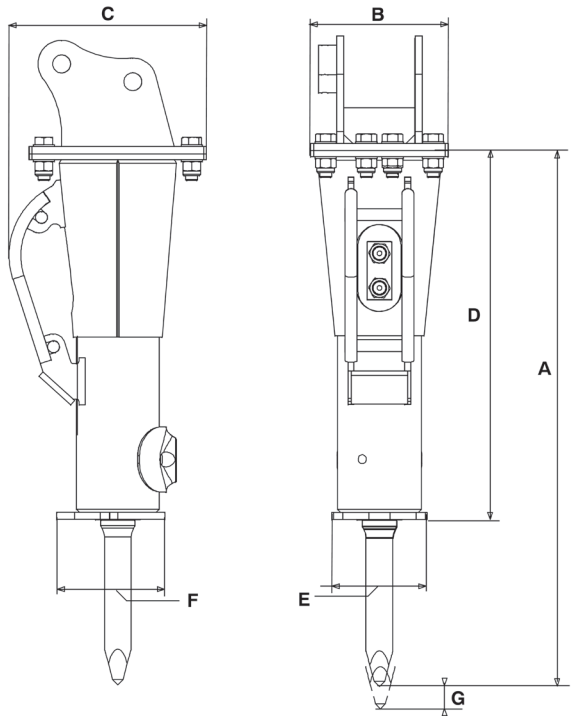

OPERATING INFORMATION		
CARRIER WEIGHT RANGE (MIN-MAX, MT)		1.2 - 2.2
OIL FLOW (MIN-MAX, L/MIN / GPM)	17 - 35	4.5 - 9
OPERATING PRESSURE (MAX, BAR/PSI)	120	1,740
BACK PRESSURE (MAX, BAR/PSI)	32	465
INPUT POWER (KW)		7
STRIKING FREQUENCY (MIN-MAX, BPM)		825 - 1,700
NOISE LEVEL /10M (DBA)		89
SOUNDPROOFING		standard
HOSE PROTECTION		standard

CONSUMABLES	PART NUMBER
GREASE CARTRIDGES (X48)	86799152

OPTIONS	PART NUMBER
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

MAINTENANCE KITS	PART NUMBER
LEVEL 1	86638954
LEVEL 2	101112774
LEVEL 3 (+2 WARRANTY YEARS*)	101112775

TOOLS		
DIAMETER (MM/IN)	47 / 1.85	47 / 1.85
LENGTH (MM/IN)	475 / 18.7	475 / 18.7
WEIGHT (KG/LB)	5.8 / 12.7	6 / 13
PART NUMBER	86621216	86620739

The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property.
©2024 Montabert. All rights reserved.

*see warranty conditions

montabert.com - montabertusa.com

US-SD12-V042024

MONTABERT®

HYDRAULIC ROCK BREAKER

SD16

NEW KEY ASSET FOR ALL JOBSITES

DESIGNED FOR 1.5 TO 3.7 TONNES CARRIERS

POWERFUL, SAFE AND COMPACT

LANDSCAPING, DEMOLITION, TRENCHING, CIVIL ENGINEERING, INSIDE AND OUTSIDE: VERSATILE AND EFFICIENT

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Tie rod free:** less weight and cost, more power and reliability.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Improved soundproofing :** lower noise levels for urban jobsites.
- **Easy handling:** two lifting points to handle the breaker with perfect balance and safety, also acting as hoses protection.
- **Tool changing:** new user friendly, simple, safe and reliable system, with one single retainer.

HYDRAULIC ROCK BREAKER

SD16

NEW KEY ASSET FOR ALL JOBSITES

WEIGHT & DIMENSIONS		
WEIGHT (KG/LB)		
BREAKER	121	266
+ MOUNTED TOOL	131	288
+ MOUNTED ADAPTER PLATE (MAX)	194	428
DIMENSIONS (MM/IN)		
A	1,036	41
B	280	11
C	427	17
D	701	28
E	186	7.32
F	205	8.07
G	34	1.33

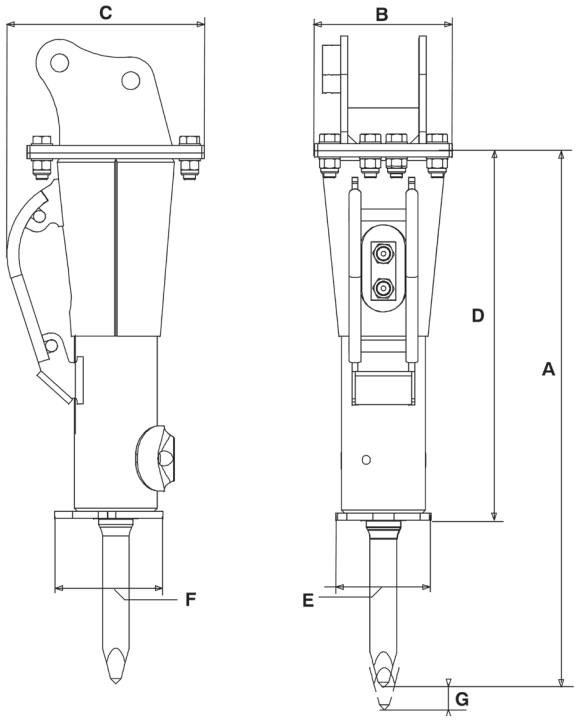

OPERATING INFORMATION		
CARRIER WEIGHT RANGE (MIN-MAX, MT)		1.5 - 3.7
OIL FLOW (MIN-MAX, L/MIN / GPM)	25 - 50	6.6 - 13
OPERATING PRESSURE (MAX, BAR/PSI)	120	1,740
BACK PRESSURE (MAX, BAR/PSI)	32	465
INPUT POWER (KW)		10
STRIKING FREQUENCY (MIN-MAX, BPM)		770 - 1,550
NOISE LEVEL /10M (DBA)		91
SOUNDPROOFING		standard
HOSE PROTECTION		standard

CONSUMABLES	PART NUMBER
GREASE CARTRIDGES (X48)	86799152

OPTIONS	PART NUMBER
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

MAINTENANCE KITS	PART NUMBER
LEVEL 1	86638962
LEVEL 2	101112777
LEVEL 3 (+2 WARRANTY YEARS*)	101112779

TOOLS		
DIAMETER (MM/IN)	55 / 2.16	55 / 2.16
LENGTH (MM/IN)	550 / 21.6	550 / 21.6
WEIGHT (KG/LB)	9.7 / 21	10 / 22
PART NUMBER	86625688	86625670

The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property.
©2024 Montabert. All rights reserved.

*see warranty conditions

montabert.com - montabertusa.com

US-SD16-V042024

MONTABERT®

HYDRAULIC ROCK BREAKER

SD22

NEW KEY ASSET
FOR ALL JOBSITES

DESIGNED FOR 2.5 TO
5.3 TONNES CARRIERS

POWERFUL,
SAFE AND COMPACT

LANDSCAPING, DEMOLITION,
TRENCHING, CIVIL ENGINEERING,
INSIDE AND OUTSIDE:
VERSATILE AND EFFICIENT

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Tie rod free:** less weight and cost, more power and reliability.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Improved soundproofing :** lower noise levels for urban jobsites.
- **Easy handling:** two lifting points to handle the breaker with perfect balance and safety, also acting as hoses protection.
- **Tool changing:** new user friendly, simple, safe and reliable system, with one single retainer.

HYDRAULIC ROCK BREAKER

SD22

NEW KEY ASSET FOR ALL JOBSITES

WEIGHT & DIMENSIONS		
WEIGHT (KG/LB)		
BREAKER	184	405
+ MOUNTED TOOL	200	440
+ MOUNTED ADAPTER PLATE (MAX)	286	631
DIMENSIONS (MM/IN)		
A	1,182	47
B	320	13
C	466	18.3
D	812	31.9
E	214	8.42
F	240	9.44
G	45	1.77

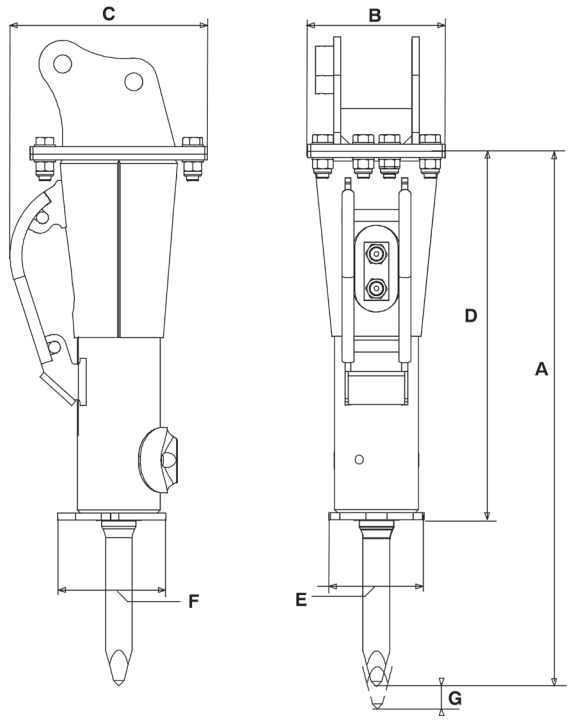

OPERATING INFORMATION		
CARRIER WEIGHT RANGE (MIN-MAX, MT)		2.5 - 5.3
OIL FLOW (MIN-MAX, L/MIN / GPM)	30 - 65	7.9 - 17
OPERATING PRESSURE (MAX, BAR/PSI)	120	1,740
BACK PRESSURE (MAX, BAR/PSI)	30	435
INPUT POWER (KW)		13
STRIKING FREQUENCY (MIN-MAX, BPM)		600 - 1,360
NOISE LEVEL /10M (DBA)		89
SOUNDPROOFING		standard
HOSE PROTECTION		standard

CONSUMABLES	PART NUMBER
GREASE CARTRIDGES (X48)	86799152

OPTIONS	PART NUMBER
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

MAINTENANCE KITS	PART NUMBER
LEVEL 1	101112784
LEVEL 2	101112785
LEVEL 3 (+2 WARRANTY YEARS*)	101112786

TOOLS		
DIAMETER (MM/IN)	65 / 2.55	65 / 2.55
LENGTH (MM/IN)	618 / 24	618 / 24
WEIGHT (KG/LB)	14.8 / 33	15.2 / 34
PART NUMBER	86636370	86636362

MONTABERT®

The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property.
©2024 Montabert. All rights reserved.

CE UKCA

*see warranty conditions

montabert.com - montabertusa.com

US-SD22-V042024

MONTABERT®

HYDRAULIC ROCK BREAKER

SD28

NEW KEY ASSET FOR ALL JOBSITES

DESIGNED FOR 3 TO 7.5 TONNES CARRIERS

POWERFUL, SAFE AND COMPACT

LANDSCAPING, DEMOLITION, TRENCHING, CIVIL ENGINEERING, INSIDE AND OUTSIDE: VERSATILE AND EFFICIENT

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Tie rod free:** less weight and cost, more power and reliability.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Improved soundproofing :** lower noise levels for urban jobsites.
- **Easy handling:** two lifting points to handle the breaker with perfect balance and safety, also acting as hoses protection.
- **Tool changing:** new user friendly, simple, safe and reliable system, with one single retainer.

HYDRAULIC ROCK BREAKER

SD28

NEW KEY ASSET FOR ALL JOBSITES

WEIGHT & DIMENSIONS		
WEIGHT (KG/LB)		
BREAKER	204	451
+ MOUNTED TOOL	231.1	511
+ MOUNTED ADAPTER PLATE (MAX)	318	701
DIMENSIONS (MM/IN)		
A	1,221	48
B	320	13
C	472	19
D	863	33.9
E	223	8.77
F	250	9.84
G	46	1.81

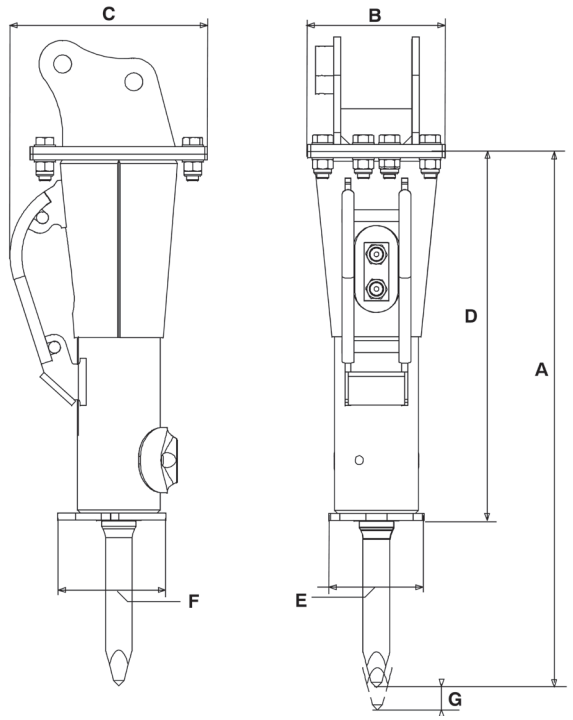

OPERATING INFORMATION		
CARRIER WEIGHT RANGE (MIN-MAX, MT)		3 - 7.5
OIL FLOW (MIN-MAX, L/MIN / GPM)	40 - 75	10.5 - 20
OPERATING PRESSURE (MAX, BAR/PSI)	120	1,740
BACK PRESSURE (MAX, BAR/PSI)	30	435
INPUT POWER (KW)		13
STRIKING FREQUENCY (MIN-MAX, BPM)		630 - 1,420
NOISE LEVEL /10M (DBA)		94
SOUNDPROOFING		standard
HOSE PROTECTION		standard

CONSUMABLES	PART NUMBER
GREASE CARTRIDGES (X48)	86799152

OPTIONS	PART NUMBER
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

MAINTENANCE KITS	PART NUMBER
LEVEL 1	101112788
LEVEL 2	101112789
LEVEL 3 (+2 WARRANTY YEARS*)	101112790

TOOLS		
DIAMETER (MM/IN)	72 / 2.8	72 / 2.8
LENGTH (MM/IN)	662 / 26	662 / 26
WEIGHT (KG/LB)	19.4 / 43	27.1 / 60
PART NUMBER	86636396	86636388

MONTABERT®

The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property.
©2024 Montabert. All rights reserved.

*see warranty conditions

montabert.com - montabertusa.com

CE UKCA

MONTABERT®

HYDRAULIC ROCK BREAKER

SD36

NEW KEY ASSET FOR ALL JOBSITES

DESIGNED FOR 4 TO 10 TONNES CARRIERS

POWERFUL, SAFE AND COMPACT

LANDSCAPING, DEMOLITION, TRENCHING, CIVIL ENGINEERING, INSIDE AND OUTSIDE: VERSATILE AND EFFICIENT

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Tie rod free:** less weight and cost, more power and reliability.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Improved soundproofing :** lower noise levels for urban jobsites.
- **Easy handling:** two lifting points to handle the breaker with perfect balance and safety, also acting as hoses protection.
- **Tool changing:** new user friendly, simple, safe and reliable system, with one single retainer.

HYDRAULIC ROCK BREAKER

SD36

NEW KEY ASSET FOR ALL JOBSITES

WEIGHT & DIMENSIONS		
WEIGHT (KG/LB)		
BREAKER	279	616
+ MOUNTED TOOL	304	671
+ MOUNTED ADAPTER PLATE (MAX)	396	873
DIMENSIONS (MM/IN)		
A	1,374	54
B	432	17
C	535	21
D	978	39
E	240	9.44
F	270	11
G	47.5	1.87

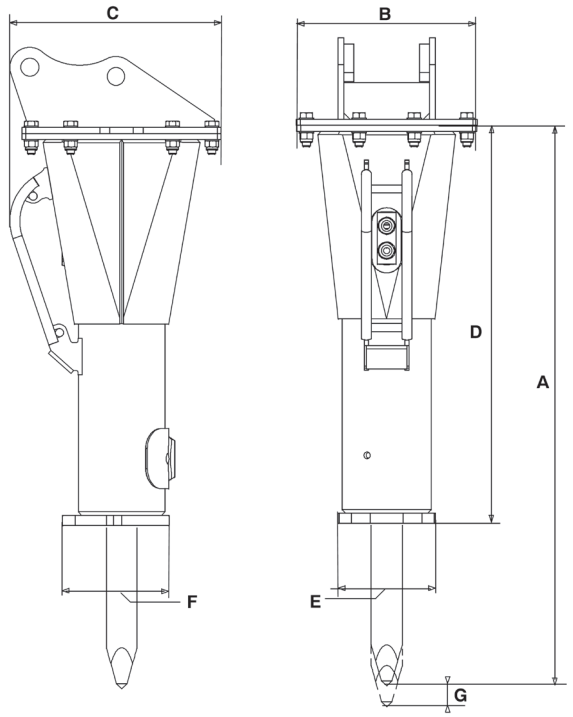

OPERATING INFORMATION		
CARRIER WEIGHT RANGE (MIN-MAX, MT)		4 - 10
OIL FLOW (MIN-MAX, L/MIN / GPM)	55 - 100	14.5 - 26.5
OPERATING PRESSURE (MAX, BAR/PSI)	125	1,815
BACK PRESSURE (MAX, BAR/PSI)	20	290
INPUT POWER (KW)		20.8
STRIKING FREQUENCY (MIN-MAX, BPM)		700 - 1,540
NOISE LEVEL /10M (DBA)		93
SOUNDPROOFING		standard
HOSE PROTECTION		standard

CONSUMABLES	PART NUMBER
GREASE CARTRIDGES (X48)	86799152

OPTIONS	PART NUMBER
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

MAINTENANCE KITS	PART NUMBER
LEVEL 1	86639960
LEVEL 2	101112794
LEVEL 3 (+2 WARRANTY YEARS*)	101112795

TOOLS			
DIAMETER (MM/IN)	76 / 2.99	76 / 2.99	76 / 2.99
LENGTH (MM/IN)	709 / 27.9	709 / 27.9	709 / 27.9
WEIGHT (KG/LB)	23 / 51	24 / 53	25 / 55
PART NUMBER	86639226	86639218	86641438

The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property.
©2024 Montabert. All rights reserved.

*see warranty conditions

montabert.com - montabertusa.com

US-SD36-V042024

MONTABERT®

HYDRAULIC ROCK BREAKER

SD42

NEW KEY ASSET FOR ALL JOBSITES

DESIGNED FOR 5 TO 12 TONNES CARRIERS

POWERFUL, SAFE AND COMPACT

LANDSCAPING, DEMOLITION, TRENCHING, CIVIL ENGINEERING, INSIDE AND OUTSIDE: VERSATILE AND EFFICIENT

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Tie rod free:** less weight and cost, more power and reliability.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Improved soundproofing :** lower noise levels for urban jobsites.
- **Easy handling:** two lifting points to handle the breaker with perfect balance and safety, also acting as hoses protection.
- **Tool changing:** new user friendly, simple, safe and reliable system, with one single retainer.

HYDRAULIC ROCK BREAKER

SD42

NEW KEY ASSET FOR ALL JOBSITES

WEIGHT & DIMENSIONS

WEIGHT (KG/LB)		
BREAKER	331	730
+ MOUNTED TOOL	364.7	804
+ MOUNTED ADAPTER PLATE (MAX)	456	1,005
DIMENSIONS (MM/IN)		
A	1,494	59
B	442	17
C	556	22
D	1,059	42
E	270	11
F	295	12
G	48	2

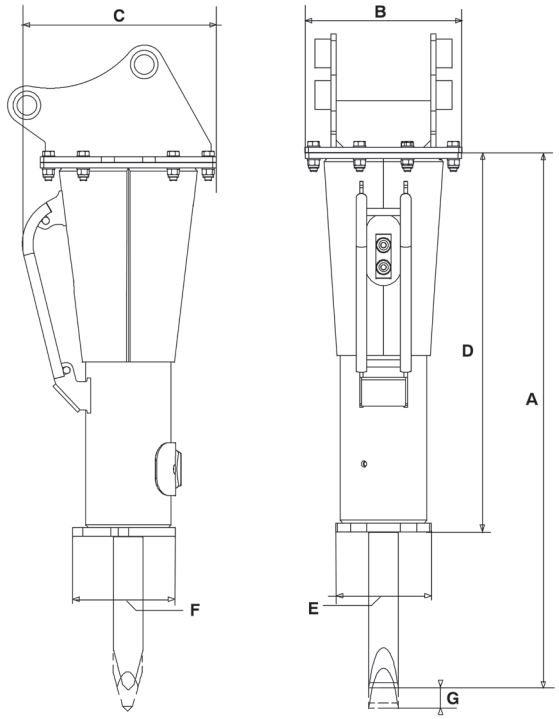

OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, MT)		5 - 12
OIL FLOW (MIN-MAX, L/MIN / GPM)	70 - 120	18.5 - 32
OPERATING PRESSURE (MAX, BAR/PSI)	125	1,815
BACK PRESSURE (MAX, BAR/PSI)	20	290
INPUT POWER (KW)		25
STRIKING FREQUENCY (MIN-MAX, BPM)		700 - 1,440
NOISE LEVEL /10M (DBA)		93
SOUNDPROOFING		standard
HOSE PROTECTION		standard

CONSUMABLES	PART NUMBER
GREASE CARTRIDGES (X48)	86799152

OPTIONS	PART NUMBER
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

MAINTENANCE KITS	PART NUMBER
LEVEL 1	101112797
LEVEL 2	101112798
LEVEL 3 (+2 WARRANTY YEARS*)	101112799

TOOLS			
DIAMETER (MM/IN)	84 / 3.3	84 / 3.3	84 / 3.3
LENGTH (MM/IN)	785 / 31	785 / 31	785 / 31
WEIGHT (KG/LB)	32 / 71	32 / 71	34 / 75
PART NUMBER	86665338	86665361	86685047

The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property.
©2024 Montabert. All rights reserved.

*see warranty conditions

montabert.com - montabertusa.com

US-SD42-V042024