



HYDRAULIC ROCK BREAKER

V1800



POWER AND
VERSATILITY
FOR ALL JOBSITES

DESIGNED FOR 20 TO
35 TONS CARRIERS

MAXIMUM IMPACT FORCE SINCE
THE VERY FIRST BLOW

A TOOL WHICH FITTED
FOR ANY SITUATION

4.0 BREAKER

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Automatic lubrication:** cartridge grease pump mounted on breaker, or tank mounted on excavator.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Dynamic energy adjustment:** two working positions automatically adjusted by the breaker.
- **Blank firing protection:** increased wear parts lifespan.



HYDRAULIC ROCK BREAKER

POWER AND VERSATILITY
FOR ALL JOBSITES

WEIGHT & DIMENSIONS

WEIGHT (LB/KG)

BREAKER	3,552	1,611
+ MOUNTED TOOL	3,885	1,762
+ MOUNTED ADAPTER PLATE (MAX)	4,716	2,139

DIMENSIONS (IN/MM)

A	76.2	1,938
B	24	620
C	21	530
D	16	408
E	3.54	90


OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, T)	20 - 35
OIL FLOW (MIN-MAX, GPM / L/MIN)	37 - 58.2 140 - 220
OPERATING PRESSURE (MAX, PSI/BAR)	2,393 165
BACK PRESSURE (MAX, PSI/BAR)	435 30
INPUT POWER (KW)	60.5
STRIKING FREQUENCY (MIN-MAX, BPM)	320 - 720
NOISE LEVEL /10M (DBA)	90
AUTOMATIC LUBRICATION	standard
SOUNDPROOFING	standard
INSPECTION KIT	standard
PRESSURIZATION	preinstalled
OMNI-M MONITORING SYSTEM	standard

OPTIONS

PART NUMBER

PRESSURIZATION KIT	86372505
SOFTSTART	86778784
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

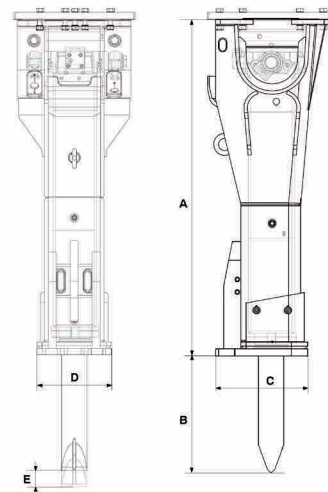

MAINTENANCE KITS

PART NUMBER

BASIC	101187472
INTERMEDIATE	101187473
ADVANCED	101187484
DEDICATED TIE RODS KIT	101187485

CONSUMABLES

PART NUMBER

BIO CHISEL PASTE CARTRIDGES (BEKALUB, 440G, X20)	101206083
ABL2 GREASE CARTRIDGES (BEKALUB, 400G X20)	86784758
ABL2 GREASE CARTRIDGES (HAND PUMP, 400G, X48)	86799152
ABL2 ABL2 GREASE BUCKET (5 KG)	86772985
ABL2 GREASE BUCKET (18 KG)	101095009
ABL2 GREASE BUCKET (180 KG)	86772951
ABLF GREASE BUCKET (5 KG)	86772993
ABLF GREASE BUCKET (18 KG)	101095008
ABLF GREASE BUCKET (180 KG)	86799137

TOOLS

DIAMETER (IN/MM)	5.5 / 140	5.5 / 140	5.5 / 140
LENGTH (IN/MM)	51 / 1,300	51 / 1,300	51 / 1,300
WEIGHT (LB/KG)	317 / 144	322 / 146	333 / 151
PART NUMBER	101255106	101255105	101255104



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2026 Montabert. All rights reserved.





HYDRAULIC ROCK BREAKER

V2500



POWER AND
VERSATILITY
FOR ALL JOBSITES

DESIGNED FOR 27 TO
40 TONS CARRIERS

MAXIMUM IMPACT FORCE SINCE
THE VERY FIRST BLOW

A TOOL WHICH FITTED
FOR ANY SITUATION

4.0 BREAKER

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Automatic lubrication:** cartridge grease pump mounted on breaker, or tank mounted on excavator.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Dynamic energy adjustment:** two working positions automatically adjusted by the breaker.
- **Blank firing protection:** increased wear parts lifespan.



HYDRAULIC ROCK BREAKER

POWER AND VERSATILITY
FOR ALL JOBSITES

WEIGHT & DIMENSIONS

WEIGHT (LB/KG)

BREAKER	4,817	2,185
+ MOUNTED TOOL	5,269	2,390
+ MOUNTED ADAPTER PLATE (MAX)	6,318	2,866

DIMENSIONS (IN/MM)

A	2,124	2,124
B	585	585
C	575	575
D	463	463
E	100	100


OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, T)	27 - 40
OIL FLOW (MIN-MAX, GPM / L/MIN)	46.3 - 66.1 185 - 250
OPERATING PRESSURE (MAX, PSI/BAR)	2,248 155
BACK PRESSURE (MAX, PSI/BAR)	363 25
INPUT POWER (KW)	64.6
STRIKING FREQUENCY (MIN-MAX, BPM)	320 - 560
NOISE LEVEL /10M (DBA)	92
AUTOMATIC LUBRICATION	standard
SOUNDPROOFING	standard
INSPECTION KIT	standard
PRESSURIZATION	preinstalled
OMNI-M MONITORING SYSTEM	standard

OPTIONS

PART NUMBER

PRESSURIZATION KIT	86372505
SOFTSTART	86778792
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

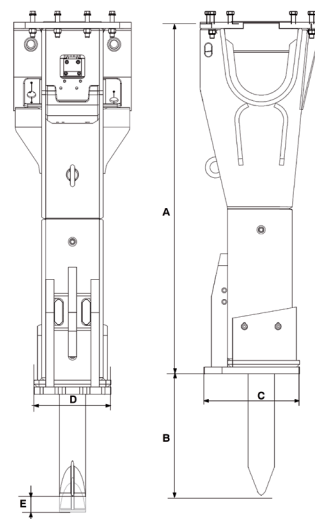

MAINTENANCE KITS

PART NUMBER

BASIC	101187545
INTERMEDIATE	101187546
ADVANCED	101187547
DEDICATED TIE RODS KIT	101187548

CONSUMABLES

PART NUMBER

BIO CHISEL PASTE CARTRIDGES (BEKALUB, 440G, X20)	101206083
ABL2 GREASE CARTRIDGES (BEKALUB, 400G X20)	86784758
ABL2 GREASE CARTRIDGES (HAND PUMP, 400G, X48)	86799152
ABL2 ABL2 GREASE BUCKET (5 KG)	86772985
ABL2 GREASE BUCKET (18 KG)	101095009
ABL2 GREASE BUCKET (180 KG)	86772951
ABLF GREASE BUCKET (5 KG)	86772993
ABLF GREASE BUCKET (18 KG)	101095008
ABLF GREASE BUCKET (180 KG)	86799137

TOOLS

DIAMETER (IN/MM)	6.29 / 160	6.29 / 160	6.29 / 160
LENGTH (IN/MM)	53 / 1,350	53 / 1,350	53 / 1,350
WEIGHT (LB/KG)	428 / 194	432 / 196	452 / 205
PART NUMBER	101255598	101182568	101255599



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2026 Montabert. All rights reserved.





HYDRAULIC ROCK BREAKER

V3500



POWER AND
VERSATILITY
FOR ALL JOBSITES

35 60

MAXIMUM IMPACT FORCE SINCE
THE VERY FIRST BLOW

A TOOL WHICH FITTED
FOR ANY SITUATION

4.0 BREAKER

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Automatic lubrication:** cartridge grease pump mounted on breaker, or tank mounted on excavator.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Dynamic energy adjustment:** two working positions automatically adjusted by the breaker.
- **Blank firing protection:** increased wear parts lifespan.



HYDRAULIC ROCK BREAKER

POWER AND VERSATILITY
FOR ALL JOBSITES

WEIGHT & DIMENSIONS

WEIGHT (LB/KG)

BREAKER	6,735	3,055
+ MOUNTED TOOL	7,361	3,339
+ MOUNTED ADAPTER PLATE (MAX)	8,492	3,852

DIMENSIONS (IN/MM)

A	91.69	2,329
B	31.25	766
C	26	660
D	20.66	525
E	4.40	112
F	121.85	3,095
G	31.10	790
H	34.64	880


OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, T)	35 - 60
OIL FLOW (MIN-MAX, GPM / L/MIN)	66 - 85 250 - 320
OPERATING PRESSURE (MAX, PSI/BAR)	2,683 185
BACK PRESSURE (MAX, PSI/BAR)	217 15
INPUT POWER (KW)	98.6
STRIKING FREQUENCY (MIN-MAX, BPM)	350 - 700
NOISE LEVEL /10M (DBA)	96
AUTOMATIC LUBRICATION	standard
SOUNDPROOFING	standard
INSPECTION KIT	standard
PRESSURIZATION	preinstalled
OMNI-M MONITORING SYSTEM	standard

OPTIONS

PART NUMBER

PRESSURIZATION KIT	86372505
SOFTSTART	86778800
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

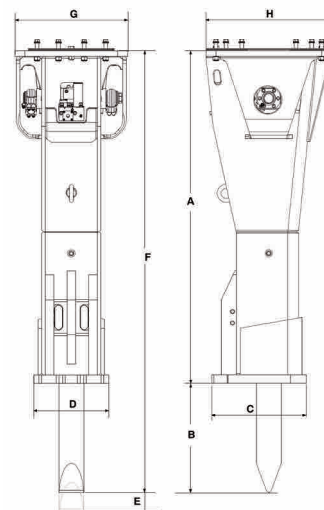

MAINTENANCE KITS

PART NUMBER

BASIC	101187549
INTERMEDIATE	101187550
ADVANCED	101187551
DEDICATED TIE RODS KIT	101187552

CONSUMABLES

PART NUMBER

BIO CHISEL PASTE CARTRIDGES (BEKALUB, 440G, X20)	101206083
ABL2 GREASE CARTRIDGES (BEKALUB, 400G X20)	86784758
ABL2 GREASE CARTRIDGES (HAND PUMP, 400G, X48)	86799152
ABL2 ABL2 GREASE BUCKET (5 KG)	86772985
ABL2 GREASE BUCKET (18 KG)	101095009
ABL2 GREASE BUCKET (180 KG)	86772951
ABLF GREASE BUCKET (5 KG)	86772993
ABLF GREASE BUCKET (18 KG)	101095008
ABLF GREASE BUCKET (180 KG)	86799137

TOOLS

		30°	30° DEG	
DIAMETER (IN/MM)	6.88 / 175	6.88 / 175	6.88 / 175	6.88 / 175
LENGTH (IN/MM)	61.42 / 1,560	61.42 / 1,560	61.42 / 1,560	61.42 / 1,560
WEIGHT (LB/KG)	595 / 269	595 / 269	595 / 269	626 / 284
PART NUMBER	101255616	101255617	101226793	101255618



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2026 Montabert. All rights reserved.





HYDRAULIC ROCK BREAKER

V4700



POWER AND
VERSATILITY
FOR ALL JOBSITES

DESIGNED FOR 45 TO
80 TONS CARRIERS

MAXIMUM IMPACT FORCE SINCE
THE VERY FIRST BLOW

A TOOL WHICH FITTED
FOR ANY SITUATION

4.0 BREAKER

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Automatic lubrication:** cartridge grease pump mounted on breaker, or tank mounted on excavator.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Dynamic energy adjustment:** two working positions automatically adjusted by the breaker.
- **Blank firing protection:** increased wear parts lifespan.
- **Cylinder sleeve:** reduced maintenance costs and increased piston guidance efficiency.
- **Reinforced housing:** HB400 bottom plates ensuring long lifespan even for the toughest working environments.



HYDRAULIC ROCK BREAKER

POWER AND VERSATILITY
FOR ALL JOBSITES

WEIGHT & DIMENSIONS

WEIGHT (LB/KG)

BREAKER	8,166	3,704
+ MOUNTED TOOL	8,950	4,059.6
+ MOUNTED ADAPTER PLATE (MAX)	11,010	4,994

DIMENSIONS (IN/MM)

A	99	2,514
B	33.2	843
C	21.7	550
D	27.6	700
E	4.8	122
F	132.2	3,357
G	32.2	817.4
H	39.8	1,010

OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, T)	45 - 80
OIL FLOW (MIN-MAX, GPM / L/MIN)	73.9 - 100.3 280 - 380
OPERATING PRESSURE (MAX, PSI/BAR)	2,683 185
BACK PRESSURE (MAX, PSI/BAR)	217.5 15
INPUT POWER (KW)	117.2
STRIKING FREQUENCY (MIN-MAX, BPM)	210 - 430
NOISE LEVEL /10M (DBA)	95
AUTOMATIC LUBRICATION	standard
SOUNDPROOFING	standard
INSPECTION KIT	standard
OMNI-M MONITORING SYSTEM	standard


OPTIONS

PART NUMBER

PRESSURIZATION KIT	86372505
SOFTSTART	86778818
	101134589
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

TOOLS

			 30°	 30° DEG	
DIAMETER (IN/MM)	7.48 / 190	7.48 / 190	7.48 / 190	7.48 / 190	7.48 / 190
LENGTH (IN/MM)	63.35 / 1,660	63.35 / 1,660	63.35 / 1,660	63.35 / 1,660	63.35 / 1,660
WEIGHT (LB/KG)	741 / 336	712 / 323	745 / 338	749 / 340	783 / 355
PART NUMBER	101255619	101255621	101255622	101226792	101255620

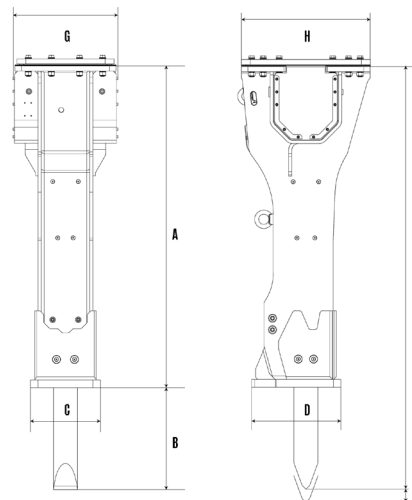

MAINTENANCE KITS

PART NUMBER

BASIC	101187646
INTERMEDIATE	101187647
ADVANCED	101187648
DEDICATED TIE RODS KIT	101187561

CONSUMABLES

PART NUMBER

BIO CHISEL PASTE CARTRIDGES (BEKALUB, 440G, X20)	101206083
ABL2 GREASE CARTRIDGES (BEKALUB, 400G X20)	86784758
ABL2 GREASE CARTRIDGES (HAND PUMP, 400G, X48)	86799152
ABL2 ABL2 GREASE BUCKET (5 KG)	86772985
ABL2 GREASE BUCKET (18 KG)	101095009
ABL2 GREASE BUCKET (180 KG)	86772951
ABLF GREASE BUCKET (5 KG)	86772993
ABLF GREASE BUCKET (18 KG)	101095008
ABLF GREASE BUCKET (180 KG)	86799137



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2026 Montabert. All rights reserved.

